



888.8.CABLCON • cablcon.com



CABLCON
AN IEWC COMPANY

VFM®

VARIABLE FIBER MANAGEMENT RACK MOUNT,
WALL MOUNT & HEAD END SOLUTIONS


IN-BUILDING RACK MOUNT HEAD END PANELS

- 1RU - 3 Adapter-Plate / Cassette capacity
- 2RU - 6 Adapter-Plate / Cassette capacity and D-rings



IN-BUILDING WALL MOUNT VARIABLE FIBER-LENGTH MANAGEMENT SYSTEM

- Wall Mount VFM® with Fiber Management Spool
- Wall Mount Slack Management
- 4 adapter plate/cassette capacity
- 12 & 24 Position MPO Cassettes

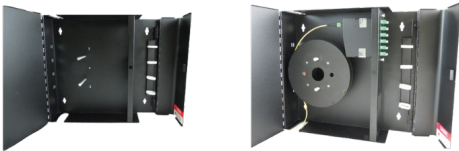

IN-BUILDING RACK MOUNT VARIABLE FIBER-LENGTH MANAGEMENT SYSTEM

- 1RU Rack Mount – Fiber Tolerance of 150' in OFNR/OFNP & 100' in Corr2Flex+®
- 2RU Rack Mount, D-Rings – Fiber Tolerance of 300' in OFNR/OFNP & 200' in Corr2Flex+®
- 3 & 6 Adapter-Plate / Cassette Capacity
- Wall Mount Slack Management
- 12 & 24 Position MPO cassettes



ASSOCIATED PRODUCTS

- Fixed attenuators
- Fiber optic patch cords
- Racks & enclosures
- Hardware
- RF braid jumpers
- RF ¼" & ½" JMA PIM rated jumpers
- RG Flex DC power cable






VALUE-ADD SERVICES

- Kitting
- Quick-ship
- Custom lengths with your run tolerance
- 12, 24 & 48 fiber factory terminated MPO connectors
- Cablcon Web Based Fiber Optic Test Report



TESTED TO MEET THESE STANDARDS

- Assembly & Manufacturing: ISO 9001 & TL 9000
- Telcordia GR-326-CORE I4, UL, ITU, IEC, & TIA



Power Distribution


Wall Mount Slack Management



TELECOM & BROADBAND



DATA CENTERS



GRID RENEWAL



TEMPORARY POWER

