




ATLAS WIRE CORP

1601 Glenlake Ave. Itasca, IL 60143
(847) 678-1210
(847) 678-1281 FAX
www.atlaswirecorp.com




SPECIFICATION SHEET

Atlas Part #: 1265T3321

Description: #12 65/30 TINNED COPPER 1/32" XLPE UL 3321

A - CONDUCTOR:	#12 65/30 TINNED STRANDED COPPER	
A1	NOMINAL O.D.	0.095"
	STANDARD	ASTM B 174
B - INSULATION:	MATERIAL	XLPE
	TEMPERATURE RATING	150C
	VOLTAGE RATING	600v
	ELONGATION	425% AVERAGE
	TENSILE STRENGTH	2300 PSI AVERAGE
B1	WALL THICKNESS (APPROX)	0.031"
B2	INSULATED O.D. (APPROX)	0.157"

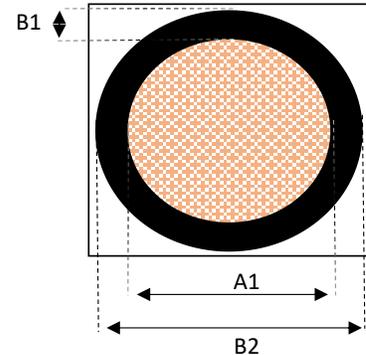

PRODUCT WEIGHT: WEIGHT / THOUSAND FEET (APPROX) 26.32 lbs.

REGULATORY COMPLIANCES REACH, RoHS, UL, CSA

PRINT LEGEND 12 AWG E25635 RU AWM STYLE 3321 150C - 600V AC 750v DC X-LINK C RU CSA LL17450 TYPE CL 1503 AWM 150C - 600V I-A/B FT-2

IMPORTANT:

All measurements are nominal, comply with applicable standards, and are subject to change. We make every reasonable effort to ensure data is current and accurate but there may be errors or omissions. It is the user's responsibility to ensure the product is relevant to their applicable usage, and according to their local codes. The sale of this product is subject to Atlas Wire LLC's standard terms and conditions.