


DESCRIPTION: 18/2 J1939 105C 300V			UNITS: IN	SCALE: 8:1	ITEM	SPECIFICATIONS
NORTHWIRE P/N: FJ1939182-003					A.	18 GAUGE 16x.010BC
CUSTOMER: IEWC	APPR BY: NN	REVD BY: OR	DWG NO: 1802C038		B.	40 MIL FOAMED XLPE INSULATION 35 MIL MIN. FOAMED XLPE INSULATION O.D. .128 ±.003
CUSTOMER P/N: J1939/1802-O-N1	DRAWN BY: DP LANGER	DATE: 4/9/2005	REV: I		C.	EXTRUDED PE FILLER ROD O.D. .095 NOM


CORE DIMENSIONS FOR INTERNAL USE ONLY

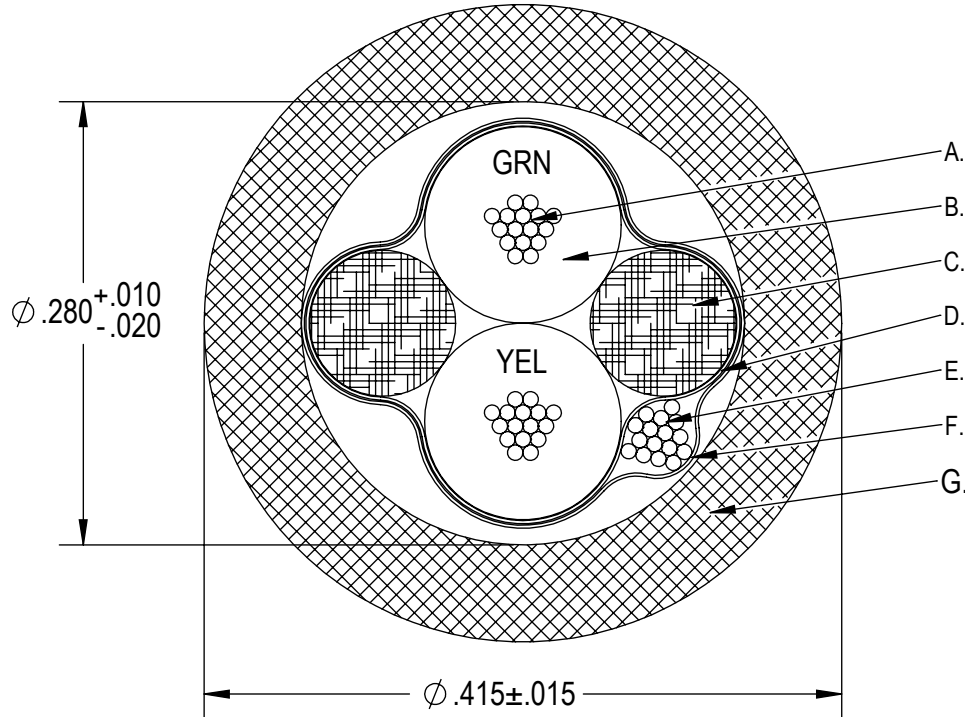

- A. 18 GAUGE 16x.010BC
- B. 40 MIL FOAMED XLPE INSULATION
35 MIL MIN. FOAMED XLPE INSULATION
O.D. .128 ±.003
- C. EXTRUDED PE FILLER ROD
O.D. .095 NOM
- D. CLEAR MYLAR WRAP
- E. 18 GAUGE 16x.010BC DRAIN
- F. ALUMINUM FOIL SHIELD; FOIL IN
- G. 50 MIL TUBED TPE JACKET
40 MIL MIN. TPE JACKET
JACKET COLOR: BLACK
NO AGENCY APPROVALS

ROHS3 DIRECTIVE (EU) 2015/863 TO AMEND ANNEX II TO EU ROHS 2, 2011/65/EU WITH NO EXEMPTIONS

FOR ADDITIONAL REGULATORY INQUIRIES PLEASE SUBMIT TO THE FOLLOWING:
RoHS_Northwire@lemo.com

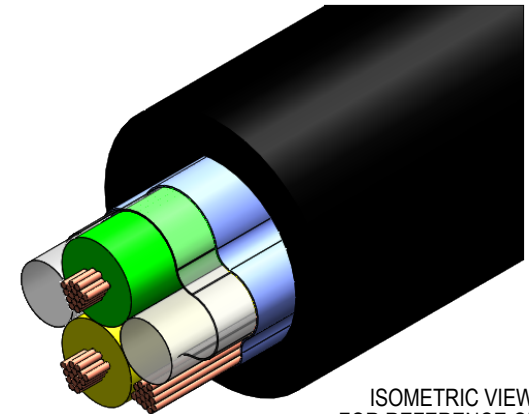

ISOMETRIC VIEW FOR REFERENCE ONLY

LEGEND SPECIFICATIONS - WHITE INK WHEEL PRINT

OSCEOLA: NORTHWIRE INC. DataCELL® TF 18 AWG 2C

SANTA TERESA: NORTHWIRE INC.-02 DataCELL® TF 18 AWG 2C

