


REV.	DESCRIPTION		DATE
0	Preliminary Release		10/22/2025

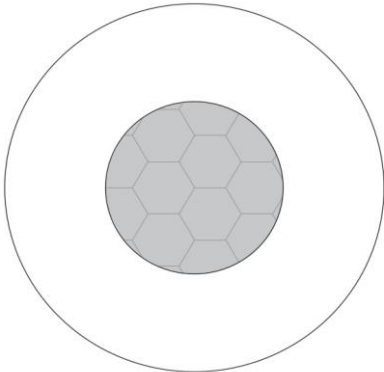

Color Code
White
Yellow

Item	Component	Description	Thickness				Dimensions					
			inch		mm		inch		mm			
			Nom	Min	Nom	Min	Nom	+/- Tol	Nom	+/- Tol		
1	Conductor:	22 AWG 7/30 Tin Copper										
2	Insulation:	EXAR 400	0.017	0.013	0.43	0.33	0.030	0.002	0.76	NA	0.064	0.05

Print: XXXXX CHAMPLAIN (*) AWM STYLE 3266 125C 300V VW-1 CSA LL30433 CL1252 XLPE 125C 300V FT1 22 AWG

Legend: XXXXX = Audit Number
 (*) = Underwriter's Symbol
 Interval = 24" Max

Electrical Data

Resistance: 17.1 Ohm/1,000' at 20°C

Voltage Rating: 300 VAC

General Data

Use: Industrial

Temperature Range: 125°C

Weight: 0.00 LBS/1000FT Nom.

Min Static Bend Radius: inches 0.4 mm 11

	TITLE		
	UL 3266 CSA CL 1252 22 AWG 7/30 TC EXAR 400 Lead Wire		
Special Characteristics <S> Safety <D> Dimensional	DRN.	J. Banfield	DATE
	CKD.		10/22/2025
DO NOT SCALE THIS DRAWING	SIZE	PART NUMBER	DOCUMENT NUMBER
	A	15-07576	20214
The information on this drawing is confidential and the proprietary property of Champlain Cable Corporation. This information may not be used, reproduced or disclosed to others, in whole or in part, without written authorization from Champlain Cable Corporation.			Preliminary Drawing for Design use only
			PAGE 1 of 1

ETF-011: Owner: V.P. Business Development 2/28/2025