

18/3, HPN 300V 105°C Flexible Heater Cord




PRODUCT DATA SHEET

Type HPN flexible heater cord is manufactured using flexible bare copper conductors laid parallel, with heat-resistant CPE jacket. Designed for use in heat-related applications, it is used in portable heaters, toasters, irons, soldering irons and paint removers.

Design Number 10362
Part Number 32132192
Customer Number N/A

CONSTRUCTION

Conductor: Stranded bare copper, Class M per ASTM B-174
Conductor Size: 18AWG(41/34)
Ground Insulation: CPE
Ground Insulation Avg. Thickness: 0.015"(Nom.)
Ground Insulated O.D: 0.081"(Nom.)
Jacket Material: CPE
Jacket Avg. Thickness: 0.045"(Nom.)
Jacket Color: Black
Overall Diameter (Width x Length): 0.362"x 0.150" (Nom.)
Approx. Cable Weight: 41 lbs/mft
Print Legend:
ASCENT E486041 UL HPN 18AWG/3C 300V 105C VW-1 GREEN CONDUCTOR
FOR GROUNDING ONLY HEATER CORD

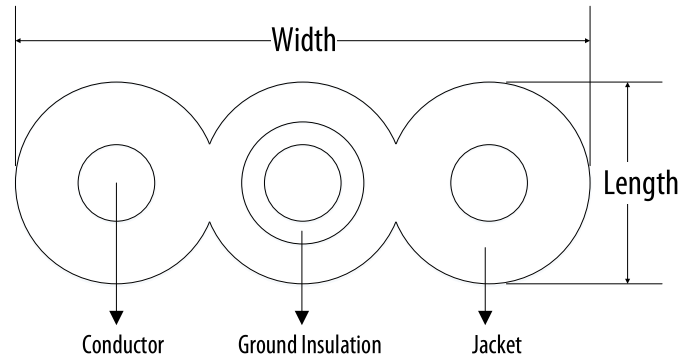

Color Code: Black jacket with green insulated ground conductor

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 105°C
Operating Voltage: 300V
Flame Test : UL VW-1
Cold Bend Test: No Crack (-40°C, 4 hours, 6 turns)

SAFETY CHARACTERISTICS

RoHS Compliance: European Directive 2015/863/EU
Approvals: UL Flexible Cord, Subject 62

Application: for use on appliances such as coffee makers, electric kettles, toasters, fry pans, soldering guns, paint removers, etc. Also for use in automotive applications such as block heaters, car warmers

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2020/08/20	Initial release
Created L. Jian		Approved A. Huang

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK

Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA

Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park, Jiangsu, China 215122

