




ATLAS WIRE CORP

1601 Glenlake Ave. Itasca, IL 60143
(847) 678-1210
(847) 678-1281 FAX
www.atlaswirecorp.com




SPECIFICATION SHEET

Atlas Part #: 2207TTWP

Description: #22 7/30 TINNED COPPER .016" PVC

A - CONDUCTOR:	#22 7/30 TINNED STRANDED COPPER	
A1	NOMINAL O.D.	0.030"
	STANDARD	ASTM B 8 ASTM B 286
B - INSULATION:	MATERIAL	PVC
	TEMPERATURE RATING	105C
	VOLTAGE RATING	60v DC
	ELONGATION	330% AVERAGE
	TENSILE STRENGTH	2450 PSI AVERAGE
B1	WALL THICKNESS (APPROX)	0.016"
B2	INSULATED O.D. (APPROX)	0.062"

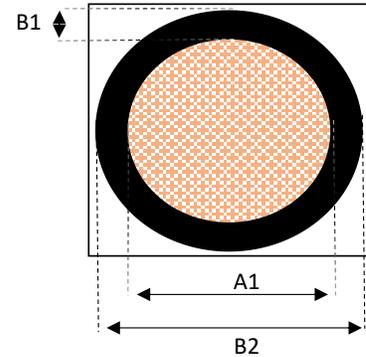

PRODUCT WEIGHT: WEIGHT / THOUSAND FEET (APPROX) 3.59 lbs.

REGULATORY COMPLIANCES REACH, RoHS, SAE

PRINT LEGEND *NO PRINT* SAE J1128 TYPE TWP 105C

IMPORTANT:

All measurements are nominal, comply with applicable standards, and are subject to change. We make every reasonable effort to ensure data is current and accurate but there may be errors or omissions. It is the user's responsibility to ensure the product is relevant to their applicable usage, and according to their local codes. The sale of this product is subject to Atlas Wire LLC's standard terms and conditions.