


# 18 AWG 19/30 BC WATERBLOKED TXL HOOKUP WIRE

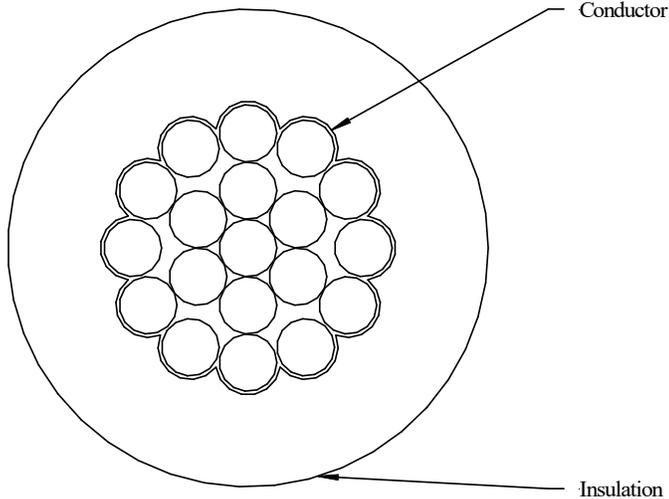

## SAFETY CERTIFICATION

**RoHS Compliance:** In accordance with EU Directive 2011/65/EU for the Restriction of Hazardous Substance as amended by 2015/863/EU

**REACH Compliance:** In accordance with the current candidate list from Regulation (EC) No 1907/2006 Article 33(1) of the European Parliament and of the Council, dated 18 December 2006, concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals

## CONSTRUCTION

**Conductor:** 18 AWG 19/30 Waterblocked Bare Copper, 0.047 Inch Diameter  
**Insulation:** 0.016 Inches of XLPE, Color – See Table  
**Diameter:** 0.079 Inches Nominal  
**Print Legend:** None

## PART NUMBERS

Part Number	Insulation Color	Put-up
TXL1819BAC -BLK	Black	10,000 ft Drum
TXL1819BAC -BRN	Brown	10,000 ft Drum
TXL1819BAC -RED	Red	10,000 ft Drum
TXL1819BAC -ORG	Orange	10,000 ft Drum
TXL1819BAC -YEL	Yellow	10,000 ft Drum
TXL1819BAC -GRN	Green	10,000 ft Drum
TXL1819BAC -DRKGRN	Dark Green	5,000 ft Spool
TXL1819BAC -BLU	Blue	10,000 ft Drum
TXL1819BAC -VIO	Violet	10,000 ft Drum
TXL1819BAC -GRY	Gray	10,000 ft Drum
TXL1819BAC -WHT	White	10,000 ft Drum

## ELECTRICAL CHARACTERISTICS

**Spark Test Voltage:** 5,000 Volts AC  
**Conductor DC Resistance:** 5.5 Ohms/1000 ft Nominal @ 20°C



134 Ferry Street  
 South Grafton, MA 01560  
 Tel: (508) 234-6372

## REVISION HISTORY

#	Date	By	Description
1	08/04/25	BF	Initial Release
2	01/09/26	HA	Added Part Numbers Table
3	01/13/26	HA	Updated Part Number Table

<b>Spec Number:</b>	<b>7333</b>
<b>Part Number:</b>	<b>See Above Table</b>
<b>Customer:</b>	<b>IEWC Global Solutions</b>
<b>Customer #:</b>	

<b>Prepared By:</b>	H. Abusamra		
<b>Reviewed By:</b>	B. Harvie		
		<b>Page</b>	
		1 of 1	